



Series

311

Special Order Adaptors

Sea Level Rating
Operating Temperature:
-40°C to +85°C



Cond. 1

- Mates all series 31, 310, & 311 Cond. 1 connectors
- 15 KVDC rated when mated to series 310 or 311
- 6.5 KVDC rated when mated to series 31



Cond. 2

- Mates all series 311 Cond. 2 connectors
- 15 KVDC rated




Cond. 3

- Mates all series 311 Cond. 3 connectors
- 15 KVDC rated


“T” Adaptor Male-Female-Male

Cond. 1 P/N 167-7825-1
Cond. 2 P/N 167-7825-2
Cond. 3 P/N 167-7825-3




Male Shorting Plug

Cond. 1 P/N 167-7905-1
Cond. 2 P/N 167-7905-2
Cond. 3 P/N 167-7905-3




“T” Adaptor Male-Male-Male

Cond. 1 P/N 167-7826-1
Cond. 2 P/N 167-7826-2
Cond. 3 P/N 167-7826-3




Female Shorting Plug

Cond. 1 P/N 167-7903-1
Cond. 2 P/N 167-7903-2
Cond. 3 P/N 167-7903-3




Straight Adaptor Female-Male

Cond. 1 to Cond. 2 P/N 178-7146
Cond. 1 to Cond. 3 P/N 178-7152
Cond. 2 to Cond. 1 P/N 178-7157
Cond. 2 to Cond. 3 P/N 178-7162
Cond. 3 to Cond. 1 P/N 178-7158
Cond. 3 to Cond. 2 P/N 178-7163




Female Protective Cover (no electrical function)

Cond. 1 P/N 167-7864-1
Cond. 2 P/N 167-7864-2
Cond. 3 P/N 167-7864-3




Straight Adaptor Male-Male

Cond. 1 to Cond. 1 P/N 178-6484
Cond. 1 to Cond. 2 P/N 178-6485
Cond. 1 to Cond. 3 P/N 178-6486
Cond. 2 to Cond. 2 P/N 178-6487
Cond. 2 to Cond. 3 P/N 178-6488
Cond. 3 to Cond. 3 P/N 178-6489




Male Protective Cover (no electrical function)

Cond. 1 P/N 167-7058-1
Cond. 2 P/N 167-7058-2
Cond. 3 P/N 167-7058-3



Straight Adaptor Female-Female

Cond. 1 P/N 178-7631-1
Cond. 2 P/N 178-7631-2
Cond. 3 P/N 178-7631-3

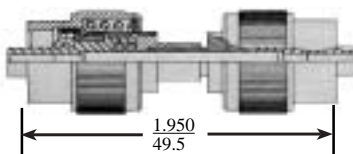

Ordering Information

Adaptors are available by special order only. To order, use the applicable Part Number.